

HART,  
Pt100 (RTD), thermocouples,  
Electrical isolation

## ■ Input

- Resistance thermometers
- Thermocouples
- Resistance-type transmitter (0 ... 5000  $\Omega$ )
- Voltages, mV transmitter (-125 ... 1100 mV)

## ■ Output

- 2-wire technique
- 4 ... 20 mA temperature linear
- HART signal

## ■ Measurement error

- 0.1 K

## ■ Continuous sensor and self-monitoring

- 2-function LEDs
- Supply voltage monitoring
- Wire break and corrosion monitoring (NE 89)

## ■ Unit software acc. to NE 53

## ■ Approvals for explosion protection

- Intrinsic Safety: ATEX EEx ia (Zone 0)
- non-incendive: ATEX EEx n A

## ■ Configuration

- FDT/DTM
- SMART VISION DSV401
- EDD



**HART**  
COMMUNICATION PROTOCOL

2-function LEDs  
Sensor matching  
Hardware write protection

**ABB**

---

## Contents

<b>1</b>	<b>Technical data</b> .....	<b>3</b>
1.1	Input.....	3
1.2	Output.....	3
1.3	Power supply (polarity safe).....	4
<b>2</b>	<b>General information</b> .....	<b>4</b>
2.1	Ambient conditions .....	4
2.2	Electromagnetic compatibility.....	4
2.3	EMI/RFI shielding .....	4
2.4	Measuring accuracy .....	5
2.5	Operating conditions .....	7
2.6	Mechanical design.....	8
<b>3</b>	<b>Communication</b> .....	<b>8</b>
<b>4</b>	<b>Explosion-protection relevant information</b> .....	<b>8</b>
4.1	TTR200-E1... (intrinsically safe) .....	8
4.2	TTR200-E2... (non-incendive) .....	9
<b>5</b>	<b>Approvals</b> .....	<b>9</b>
<b>6</b>	<b>Terminal connection diagrams</b> .....	<b>10</b>
<b>7</b>	<b>Dimensional drawings</b> .....	<b>10</b>
<b>8</b>	<b>Ordering information</b> .....	<b>11</b>
<b>9</b>	<b>Order form configuration</b> .....	<b>12</b>

## 1 Technical data

### 1.1 Input

#### 1.1.1 Resistance

##### RTD resistance thermometer

Pt100 in acc. with DIN IEC 60751, JIS, MIL, Ni in acc. with  
DIN 43760, Cu

(for additional information, see the section "Measuring accuracy")

##### Resistance measurement

0 ... 500  $\Omega$

0 ... 5000  $\Omega$

##### Sensor connections

2-, 3-, 4-wire circuit

##### Connecting cables

2-, 3-, 4-wire max. sensor line resistance ( $R_W$ ) for each wire 50  $\Omega$   
in acc. with NE 89 (March 2003);

(3-wire balanced, 2-wire circuit compensation up to 100  $\Omega$  sensor  
total line resistance)

##### Measurement current

< 300  $\mu$ A

##### Sensor short-circuit

< 5  $\Omega$  (for RTD)

##### Sensor wire break (temperature resistance measurement 2-, 3-, 4-wire)

Measuring range 0 ... 500  $\Omega$  > 0.6 ... 10 k $\Omega$

Measuring range 0 ... 5 k $\Omega$  > 5.3 ... 10 k $\Omega$

##### Corrosion detection in accordance with NAMUR NE 89

3-wire resistance reading > 50  $\Omega$

4-wire resistance reading > 50  $\Omega$

#### 1.1.2 Thermocouples/Voltages

##### Types

B, E, J, K, L, N, R, S, T, U, C, D

##### Voltages

-125 ... 125 mV

-125 ... 1100 mV

##### Connecting cables

Max. sensor line resistance ( $R_W$ ) for each line 1.5 k $\Omega$ , total 3 k $\Omega$

##### Sensor wire break monitoring in accordance with Namur NE 89

pulsed with 1  $\mu$ A outside the measurement interval

Thermocouple measurement 5.3 ... 10 k $\Omega$

Voltage measurement 5.3 ... 10 k $\Omega$

##### Input resistance

> 10 M $\Omega$

##### Internal reference junction

Pt1000, DIN IEC 60751 Cl. B

(no jumpers necessary)

##### Sensor matching

via single point (offset adjustment)

via two point adjustment

##### Sensor fault signaling

RTD sensor: Short circuit and wire break

Linear resistance measurement: Wire break

Thermocouple: Wire break

Linear voltage measurement: Wire break

### 1.2 Output

##### Transmission characteristics

temperature linear

resistance linear

voltage linear

##### Output signal

Configurable 4 ... 20 mA (standard)

Configurable 20 ... 4 mA

(NE43 dynamic range: 3.8 ... 20.5 mA)

##### Simulation mode

3.5 ... 23.6 mA

##### Induced current consumption

< 3.5 mA

##### Maximum output current

23.6 mA

##### Configurable error current signal

override 22 mA (20.0 ... 23.6 mA)

underdrive 3.6 mA (3.5 ... 4.0 mA)

### 1.3 Power supply (polarity safe)

(2-wire technique; power lines = signal lines)

#### Supply voltage

Non ignition-proof application:

$$U_s = 12 \dots 42 \text{ V DC}$$

Ignition-proof applications:

$$U_s = 12 \dots 30 \text{ V DC}$$

#### Max. permissible residual ripple for supply voltage

Max. permissible ripple for supply voltage during communication in accordance with HART FSK "Physical Layer" specification, version 8.1 (08/1999) Section 8.1

#### Undervoltage detection

$$U_{\text{Terminal-Mu}} < 11 \text{ V results in } I_a = 3.6 \text{ mA}$$

#### Max. load

$$R_{\text{Load}} = (\text{supply voltage} - 12 \text{ V}) / 0.022 \text{ A}$$

#### Max. load ( $\Omega$ depending on supply voltage (V DC))

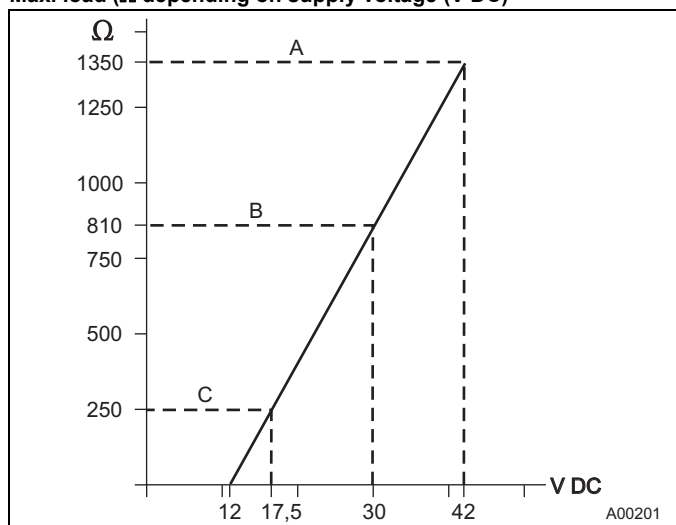


Fig. 1

- A TTR200
- B TTR200 in EEx ia design
- C HART communication - resistor

#### Max. power consumption

$$P = U_s \times 0.022 \text{ mA}$$

e.g.,  $U_s = 24 \text{ V} \rightarrow P_{\text{max}} = 0.528 \text{ W}$

## 2 General information

<b>Electrical isolation</b> (input/output)	3.5 kV DC (approx. 2.5 kV AC) 60 s
<b>MTBF time</b>	28 years at 60 °C ambient temperature
<b>Input filter</b>	50 / 60 Hz
<b>Switch-on delay</b>	< 10 s ( $I_a \leq 3.6 \text{ mA}$ during starting cycle)
<b>Warm-up time</b>	5 min.
<b>Ramp-up time t90</b>	400 ... 1000 ms
<b>Reading updated<sup>1)</sup></b>	10/sec
<b>Output filter</b>	Digital filter 1st order: 0 ... 100 s

<sup>1)</sup> depending on sensor type and sensor circuit

### 2.1 Ambient conditions

**Ambient temperature:** Standard: -40 ... 85 °C / -40 ... 185 °F  
For ignition-proof design, see prototype test certificate PTB 05 ATEX 2017 X.

**Transport / storage temperature:** -40 ... 85 °C / -40 ... 185 °F

**Climate class:** Cx (-40 ... 85 °C / -40 ... 185 °F, 5 ... 95% relative humidity)  
DIN EN 60654-1

**Max. permissible humidity:** 95% relative humidity IEC 60068-2-30

**Vibration resistance\*:** 10 ... 2000 Hz at 5 g acc. to IEC 68-2-6

**Shock\*:** gn = 30 in accordance with IEC 68-2-27

**Protection class:** IP20, or IP class of bay

\* applies to operation and transport

### 2.2 Electromagnetic compatibility

Emitted interference in accordance with IEC 61326 (2006) and Namur NE21 (02/2004)

### 2.3 EMI/RFI shielding

Interference immune in accordance with IEC 61326 (2006) and Namur NE21 (02/2004)

Pt100: Measuring range 0 ... 100 °C, span 100 K

Type of test	Testing accuracy	Influence
Burst to signal/data lines	2 kV	< 0,5%
Static discharge		
• Contact plate (indirect)	8 kV	no
• Supply terminals <sup>1)</sup>	6 kV	no
• Sensor terminals <sup>1)</sup>	4 kV	no
Radiated field		
80 MHz ... 2 GHz	10 V / m	< 0,5%
Coupling		
150 kHz ... 80 MHz	10 V	< 0,5%
Surge		
between the supply lines	0,5 kV	no malfunction
Line to earth	1 kV	no malfunction

<sup>1)</sup> Air discharge (at 1 mm distance)

## 2.4 Measuring accuracy

Includes linearity deviation, reproducibility/hysteresis at 23 °C ± 5 K and 20 V supply voltage

Information on measuring accuracy corresponds to 3 σ (Gaussian distribution)

Input element		Measuring range limits	Minimum span	Digital measuring accuracy (24-bit A/D converter)	D/A accuracy <sup>1)</sup> (1 6-bit DA)
Standard	Sensor				
<b>Resistance sensors/potentiometer</b>					
<b>DIN IEC 60 751</b>	RTD Pt10 (a=0,003850)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,80 °C / ± 1,44 °F	± 0,05 %
	RTD Pt50 (a=0,003850)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,16 °C / ± 0,29 °F	± 0,05 %
	RTD Pt100 (a=0,003850) <sup>2)</sup>	<b>-200 ... 850 °C / -328 ... 1562 °F</b>	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
	RTD Pt200 (a=0,003850)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,24 °C / ± 0,43 °F	± 0,05 %
	RTD Pt500 (a=0,003850)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,16 °C / ± 0,29 °F	± 0,05 %
	RTD Pt1000 (a=0,003850)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
<b>JIS C1604-81</b>	RTD Pt10 (a=0,003916)	-200 ... 645 °C / -328 ... 1193 °F	10 °C / 18 °F	± 0,80 °C / ± 1,44 °F	± 0,05 %
	RTD Pt50 (a=0,003916)	-200 ... 645 °C / -328 ... 1193 °F	10 °C / 18 °F	± 0,16 °C / ± 0,29 °F	± 0,05 %
	RTD Pt100 (a=0,003916)	-200 ... 645 °C / -328 ... 1193 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
<b>MIL-T-24388</b>	RTD Pt10 (a=0,003920)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,80 °C / ± 1,44 °F	± 0,05 %
	RTD Pt50 (a=0,003920)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,16 °C / ± 0,29 °F	± 0,05 %
	RTD Pt100 (a=0,003920)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
	RTD Pt200 (a=0,003920)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,24 °C / ± 0,43 °F	± 0,05 %
	RTD Pt1000 (a=0,003920)	-200 ... 850 °C / -328 ... 1562 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
<b>DIN 43760</b>	RTD Ni50 (a=0,006180)	-60 ... 250 °C / -76 ... 482 °F	10 °C / 18 °F	± 0,16 °C / ± 0,29 °F	± 0,05 %
	RTD Ni100 (a=0,006180)	-60 ... 250 °C / -76 ... 482 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
	RTD Ni120 (a=0,006180)	-60 ... 250 °C / -76 ... 482 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
	RTD Ni1000 (a=0,006180)	-60 ... 250 °C / -76 ... 482 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
	RTD Cu10 (a=0,004270)	-50 ... 200 °C / -58 ... 392 °F	10 °C / 18 °F	± 0,80 °C / ± 1,44 °F	± 0,05 %
	RTD Cu100 (a=0,004270)	-50 ... 200 °C / -58 ... 392 °F	10 °C / 18 °F	± 0,08 °C / ± 0,14 °F	± 0,05 %
	Resistance measurement	0 ... 500 Ω	4 Ω	± 32 mΩ	± 0,05 %
	Resistance measurement	0 ... 5000 Ω	40 Ω	± 320 mΩ	± 0,05 %
<b>Thermocouples<sup>3)</sup>/voltages</b>					
<b>IEC 584</b>	Type K (Ni10Cr-Ni5)	-270 ... 1372 °C / -454 ... 2502 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
	Type J (Fe-Cu45Ni)	-210 ... 1200 °C / -346 ... 2192 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
	Type N (Ni14CrSi-NiSi)	-270 ... 1300 °C / -454 ... 2372 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
	Type T (Cu-Cu45Ni)	-270 ... 400 °C / -454 ... 752 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
	Type E (Ni10Cr-Cu45Ni)	-270 ... 1000 °C / -454 ... 1832 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
	Type R (Pt13Rh-Pt)	-50 ... 1768 °C / -58 ... 3215 °F	100 °C / 180 °F	± 0,95 °C / ± 1,71 °F	± 0,05 %
	Type S (Pt10Rh-Pt)	-50 ... 1768 °C / -58 ... 3215 °F	100 °C / 180 °F	± 0,95 °C / ± 1,71 °F	± 0,05 %
	Type B (Pt30Rh-Pt6Rh)	-0 ... 1820 °C / +32 ... 3308 °F	100 °C / 180 °F	± 0,95 °C / ± 1,71 °F	± 0,05 %
<b>DIN 43710</b>	Type L (Fe-CuNi)	-200 ... 900 °C / -328 ... 1652 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
	Type U (Cu-CuNi)	-200 ... 600 °C / -328 ... 1112 °F	50 °C / 90 °F	± 0,35 °C / ± 0,63 °F	± 0,05 %
<b>ASTM E 988</b>	Type C	-0 ... 2315 °C / +32 ... 4200 °F	100 °C / 180 °F	± 1,35 °C / ± 2,43 °F	± 0,05 %
	Type D	-0 ... 2315 °C / +32 ... 4200 °F	100 °C / 180 °F	± 1,35 °C / ± 2,43 °F	± 0,05 %
	Voltage measurement	-125 mV ... 125 mV	2 mV	± 12 μV	± 0,05 %
	Voltage measurement	-125 mV ... 1100 mV	20 mV	± 120 μV	± 0,05 %

<sup>1)</sup> percentages refer to the configured measuring span

<sup>2)</sup> Standard model

<sup>3)</sup> include the internal reference junction error for digital accuracy: Pt100, DIN IEC 60751 Cl. B

<sup>4)</sup> without reference junction error

Total accuracy = digital measuring accuracy [°C] + (D/A measuring accuracy [%] x | conf. measuring span [°C] | /100%)

(refer to the block diagram on next page)

### Example 1:

Pt100 (IEC 60751), conf. measuring range 0 ... 100 °C, conf. measuring span = measurement end – measurement start = 100 °C

Digital measuring accuracy: ± 0,08 °C

D/A measuring accuracy ± 0.05% x (100 °C/100%) = ± 0,05 °C

Total accuracy: Digital accuracy + D/A accuracy; ± 0,08 °C + (± 0,05 °C) = ± 0,13 °C

### Example 2:

Thermocouple type K, conf. measuring range 0 ... 1000 °C, conf. measuring span = measurement end – measurement start = 1000 °C

Digital measuring accuracy: ± 0,35 °C

D/A measuring accuracy ± 0.05% x (1000 °C/100%) = ± 0,50 °C

Total accuracy<sup>4)</sup>: Digital accuracy + D/A accuracy; ± 0,35 °C + (± 0,50 °C) = ± 0,85 °C

### Long-term drift

± 0.05 °C or ± 0.05%<sup>1)</sup> per year, the larger value applies.

2.4.1 Block diagram

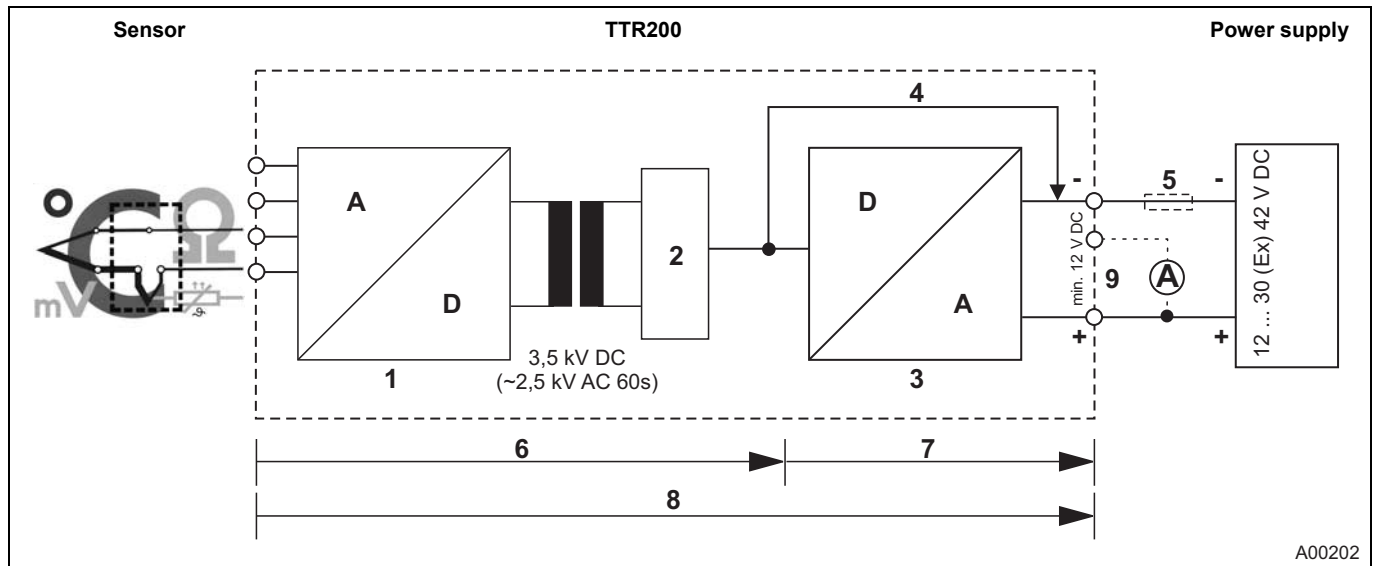


Fig. 2

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1 24-bit A/D converter</li> <li>2 Microcontroller</li> <li>3 16-bit D/A converter</li> <li>4 HART signal</li> <li>5 Load (observe voltage drop, refer to the section "Terminal connection diagrams")</li> </ul> | <ul style="list-style-type: none"> <li>6 Digital measuring accuracy</li> <li>7 D/A measuring accuracy</li> <li>8 Overall measuring accuracy</li> <li>9 Terminal 11, measurement of 4 ... 20 mA output current without opening / interrupting the current loop (internal resistance ammeter &lt; 15 Ω)</li> </ul> |
|--|--|

## 2.5 Operating conditions

The percentages refer to the configured measuring span.

**Supply voltage influence/load influence:** within the specified limits for the voltage/load the total influence is less than 0.001% per volt

**Common-mode interference** no influence up to 100 V Veff (50 Hz) or 50 VDC

**Ambient temperature influence:** based on 23 °C / 73.4 °F (ambient temperature range: -40 ... 85 °C / -40 °F ... 185 °F)

Sensor	Ambient temperature influence For 1 °C / 1.8 °F dev. to 23 °C / 73,4 °F for digital readings	Ambient temperature influence <sup>1)</sup> For 1 °C / 1.8 °F dev. to 23 °C / 73,4 °F for D/A converter
2-, 3-, 4-wire circuit		
RTD Pt10 IEC, JIS, MIL	± 0.04 °C / ± 0.072 °F	± 0.003 %
RTD Pt50 IEC, JIS, MIL	± 0.008 °C / ± 0.014 °F	± 0.003 %
RTD Pt100 IEC, JIS, MIL	± 0.004 °C / ± 0.007 °F	± 0.003 %
RTD Pt200 IEC, MIL	± 0.02 °C / ± 0.036 °F	± 0.003 %
RTD Pt1000 IEC, MIL	± 0.004 °C / ± 0.007 °F	± 0.003 %
RTD Ni50 DIN 43760	± 0.008 °C / ± 0.014 °F	± 0.003 %
RTD Ni100 DIN 43760	± 0.004 °C / ± 0.007 °F	± 0.003 %
RTD Ni120 DIN 43760	± 0.003 °C / ± 0.005 °F	± 0.003 %
RTD Ni1000 DIN 43760	± 0.004 °C / ± 0.007 °F	± 0.003 %
Resistance measurement 0 ... 500 Ω	± 0.002 Ω	± 0.003 %
Resistance measurement 0 ... 5000 Ω	± 0.02 Ω	± 0.003 %
Thermoelement for all defined types	± [(0.001% x (ME[mV] / MS[mV]) + (100% x (0.009 °C / MS [°C])) <sup>1)</sup>	± 0.003 %
Voltage measurement -125 ... 125 mV	± 1.5 µV	± 0.003 %
-125 ... 1100 mV	± 15 µV	± 0.003 %

<sup>1)</sup> percentages refer to the configured measuring span  
ME - Measuring end, MS - Measuring span

### Example 1

Pt100 configured measuring range 0 ... 100 °C, (measuring span 100 °C), ambient temperature 33 °C

Dev. from standard temperature: 33 ... 23 °C (reference) = 10 °C

Affect of ambient temperature on digital measurement: 10 °C x ± 0.004 °C / °C = ± 0.04 °C

Affect of ambient temperature on D/A converter: 10 °C x (± 0.003 % / °C) x (100 °C / 100 %) = ± 0.03 °C

### Example 2

TC type K, conf. measuring range 0 ... 1000 °C, (measuring span 1000 °C), ambient temperature 33 °C

Measuring start 0 °C corresponds to 0.0 mV; measuring end = 1000 °C corresponds to 41.6 mV; measuring span = 1000 °C or 41.6 mV

Dev. from standard temperature: 33 ... 23 °C (reference) = 10 °C

Affect of ambient temperature on digital measurement: 10 °C x [(± 0.001% x 41.6 mV / 41.6 mV) + (100% x ± 0.009 °C / 1000°C)] x (1000°C / 100%) / °C = ± 0.19 °C

Affect of ambient temperature on D/A converter: 10 °C x [± 0.003 % x 1000 °C / 100 %] / °C = ± 0.3 °C

### Worst case total error analysis

Max. possible total error = SQR [(digital accuracy)<sup>2</sup> + (D/A accuracy) + (digital value temp. influence) + (D/A temp. influence)]

Example 1: Pt100, 0 ... 100°C at 33 °C ambient temperature =  $\sqrt{(0.08\text{ }^\circ\text{C})^2 + (0.05\text{ }^\circ\text{C})^2 + (0.04\text{ }^\circ\text{C})^2 + (0.03\text{ }^\circ\text{C})^2} = 0.10\text{ }^\circ\text{C}$

Example 2: Thermoelement type K, 0 ... 1000 °C at 33 °C ambient temperature =  $\sqrt{(0.35\text{ }^\circ\text{C})^2 + (0.50\text{ }^\circ\text{C})^2 + (0.19\text{ }^\circ\text{C})^2 + (0.3\text{ }^\circ\text{C})^2} = 0.70\text{ }^\circ\text{C}$   
(without reference junction error)

## 2.6 Mechanical design

- Dimensions:** Refer to dimensioned drawings  
**Weight:** 180 g  
**Material:**
- Housing: Plastic polyamide
  - Color: gray RAL9002
- Installation conditions:**
- Mounting orientation No limitations
  - Installation options: 35 mm rail mounting acc. to EN 60175
- Electrical connection:**
- Connection terminals with screw connections, plug-in
  - Lines up to max. 2.5 mm<sup>2</sup>

## 3 Communication

### HART protocol version 5

The system is registered with the HART Communication Foundation.

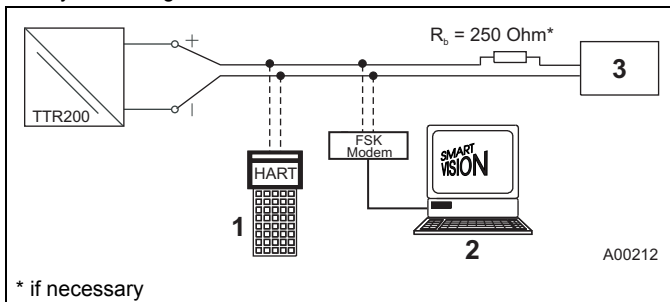


Fig. 3

- |                      |                                    |
|----------------------|------------------------------------|
| 1 Hand-held terminal | 3 Ground connection (optional)     |
| 2 FDT/DTM technology | 4 Power supply (process interface) |

### Operating modes

- Point-to-point communication mode: standard (general address 0)
- Multidrop mode (addressing 1 ... 15)

### Configuration options and tools

- FDT/DTM technology – via TTX200 DTM driver
- DSV401 (SMART VISION)
- EDD - via TTX200 EDD driver

### Configuration parameters

#### Measurement type

- Sensor type, connection type
- Fault signaling
- Flow range
- General information, e.g., TAG number
- Damping
- Signal simulation of output
- See "Order form configuration"

### Write Protection

- Hardware write protection via DIP switch

### Diagnostic signaling

- Optical via LEDs, red/green (red LED: sensor & unit fault signaling green LED: supply voltage display)
- Over/underdrive acc. to NE43
- HART diagnostic

### Diagnostic information (NE107)

- Sensor error (wire break or short circuit)
- Device error
- Over/under measuring range
- Simulation activated

## 4 Explosion-protection relevant information

### 4.1 TTR200-E1... (intrinsically safe)

Approved for use in zone 0.

#### Designation:

- II 1G EEx ia IIC T6 (Zone 0)
- II 2 (1) G EEx [ia] ib IIC T6 (zone 1 [0])
- II 2 G (1D) Ex [iaD] ib IIC T6 (zone 1 [20])



### Important

The Ex or ignition-proof designation is provided on the name plate.

EC prototype test certificate: Refer to PTB 05 ATEX2017 X.

### Temperature table

Temperature class	Permissible ambient temperature range	
	Device category 1 use	Device category 2 use
T6	-40 ... 44 °C	-40 ... 56 °C
T5	-40 ... 56 °C	-40 ... 71 °C
T4, T3, T2, T1	-40 ... 60 °C	-40 ... 85 °C



## Safety specifications

### Intrinsically safe EEx ia IIC explosion protection

	Supply circuit	Measurement current circuit / passive transducer (RTD)	Measurement current circuit / active transducer (RTD)
Max. voltage	$U_i = 30 \text{ V}$	$U_o = 6,5 \text{ V}$	$U_o = 1,2 \text{ V}$
Short-circuit current	$I_i = 130 \text{ mA}$	$I_o = 25 \text{ mA}$	$I_o = 50 \text{ mA}$
Max. power	$P_i = 0,8 \text{ W}$	$P_o = 38 \text{ mW}$	$P_o = 60 \text{ mW}$
Internal inductance	$L_i = 0,5 \text{ mH}$	$L_i = 0 \text{ mH}$	$L_i = 0 \text{ mH}$
Internal capacitance	$C_i = 5 \text{ nF}$	$C_i = 49 \text{ nF}$	$C_i = 49 \text{ nF}$
Maximum permissible external inductance		$L_o = 5 \text{ mH}$	$L_o = 5 \text{ mH}$
Maximum permissible external capacitance		$C_o = 1,55 \text{ }\mu\text{F}$	$C_o = 1,05 \text{ }\mu\text{F}$

## 4.2 TTR200-E2... (non-incendive)

Approved for use in zone 2.

### Designation:

- II 3 G EEx n A II T6



### Important

The Ex or ignition-proof designation is provided on the name plate.

ABB manufacturer's declaration in accordance with ATEX directive

### Temperature table

Temp.- class	Device category 2 use
T6	-40 ... 56 °C
T5	-40 ... 71 °C
T4	-40 ... 85 °C

## 5 Approvals

### CE mark:

The TTR200 meets all requirements for the CE mark in accordance with IEC 61326 (2006).

### Ignition protection:

The TTR200 complies with the requirements of ATEX directive 94/9 EC. For additional information, refer to the section "Explosion-protection relevant information").

## 6 Terminal connection diagrams

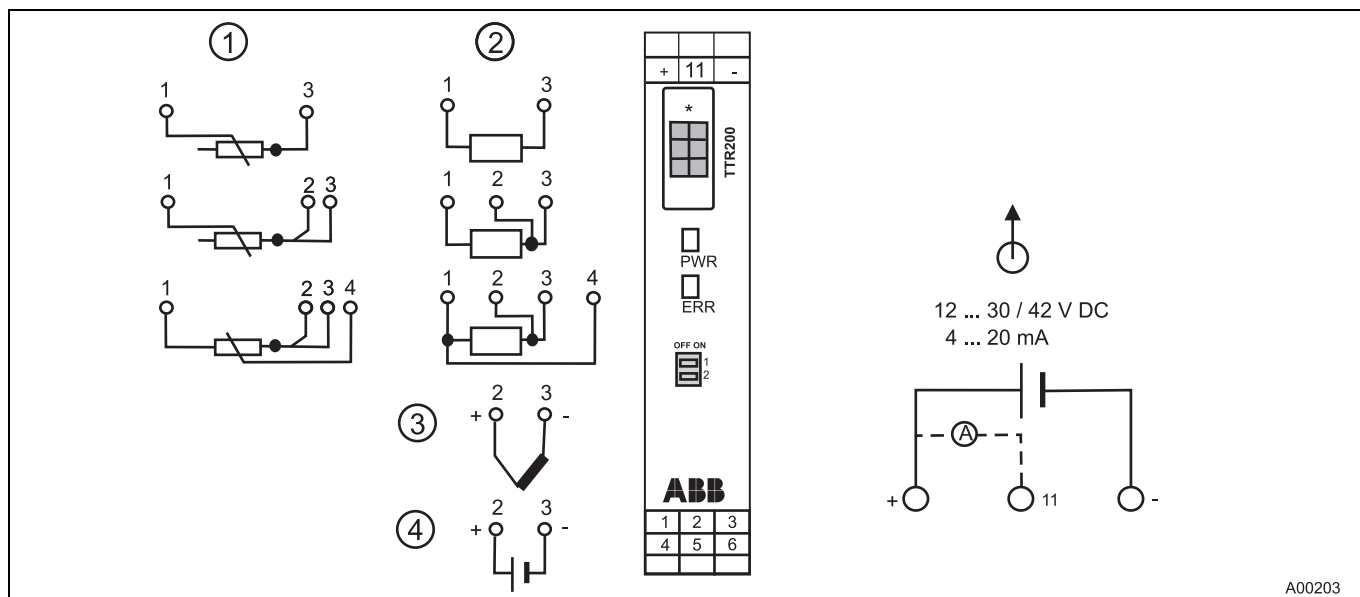


Fig. 4: \*(planned local configuration interface/inoperable)

- |                    |                       |
|--------------------|-----------------------|
| 1 Potentiometer    | 3 Thermocouple        |
| 2 RTD (e.g. Pt100) | 4 Voltage measurement |

### Note

Terminal 11: Measurement of 4 ... 20 mA output current without opening / interrupting the current loop (see chapter 2.4.1 Block diagram).

- PWR / green LED: Supply voltage display
- ERR / red LED: sensor, sensor lead & unit fault signaling
  
- DIP switch 1: on -> Hardware write protection is enabled
- DIP switch 2: no function

## 7 Dimensional drawings

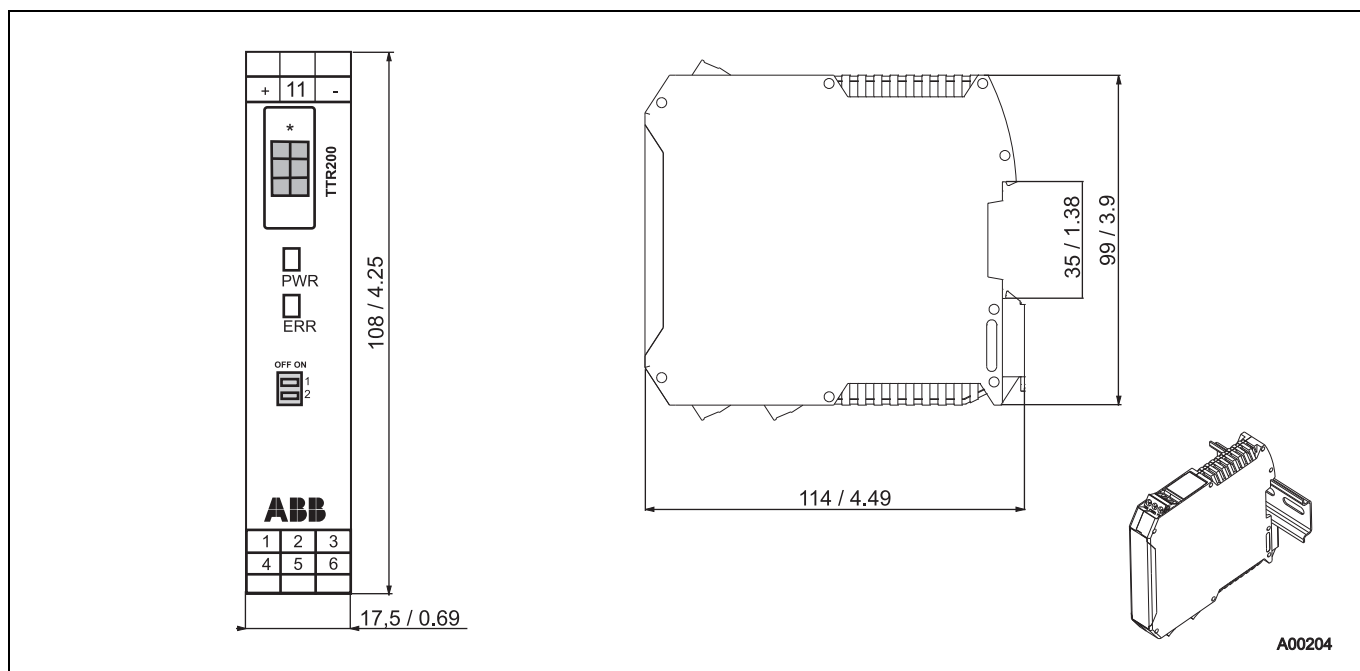


Fig. 5: Dimensions in mm / inch

- 1 Rail housing for mounting on 35 mm rail acc. to EN 60175

## 8 Ordering information

<b>Rail mounted Temperature Transmitter TTR200</b> <b>Standard configuration:</b> Pt100 3-wire circuit, 0 ... 100 °C, Damping off, rising characteristic Override for sensor or device errors (>= 22 mA)	Variant digit No.	1 - 7	8	9	10	Code			
	Catalog No.	TTR200-							
<b>Explosion protection</b> No ignition protection			Y	0					
<b>Ignition protection type: Intrinsic Safety ATEX</b> ATEX Zone 0: II 1G EEx ia IIC T6 Zone 1 (0): II 2 (1) G EEx [ia] ib IIC T6 Zone 1 (20): II 2 G (1D) Ex [iaD] ib IIC T6			E	1					
<b>Type of Protection: "nA" (Non Incendive) ATEX</b> ATEX Zone 2: II 3G EEx nA II T6			E	2					
<b>Communication protocol</b> HART						H			
<b>Additional ordering information</b>									
						Code			
<b>Configuration</b> Customer-specific configuration with report						BF			
<b>Calibration certificate</b> With 5-point - factory calibration certificate						EM			
<b>Customer specific design according to NL no.</b> (please specify)						Z9			

## 9 Order form configuration

Information on customer-specific configuration of temperature transmitter TTR200.

Configuration		Selection
DIN IEC 60 751	RTD	<input type="checkbox"/> Pt10 <input type="checkbox"/> Pt50 <input type="checkbox"/> <b>Pt100</b> (standard)
JIS C1604-81		<input type="checkbox"/> Pt200 <input type="checkbox"/> Pt500 <input type="checkbox"/> Pt1000
MIL-T-24388		<input type="checkbox"/> Pt10 <input type="checkbox"/> Pt50 <input type="checkbox"/> Pt100
DIN 43760		<input type="checkbox"/> Pt10 <input type="checkbox"/> Pt50 <input type="checkbox"/> Pt100 <input type="checkbox"/> Pt200 <input type="checkbox"/> Pt1000
Cu		<input type="checkbox"/> Ni50 <input type="checkbox"/> Ni100 <input type="checkbox"/> Ni120 <input type="checkbox"/> Ni1000  <input type="checkbox"/> Cu10 <input type="checkbox"/> Cu100
	Linear resistance measurement	<input type="checkbox"/> 0 ... 500 Ω <input type="checkbox"/> 0 ... 5000 Ω
IEC 584	Thermocouple	<input type="checkbox"/> Type K <input type="checkbox"/> Type J <input type="checkbox"/> Type N <input type="checkbox"/> Type R <input type="checkbox"/> Type S <input type="checkbox"/> Type T <input type="checkbox"/> Type E <input type="checkbox"/> Type B
DIN 43710		<input type="checkbox"/> Type L <input type="checkbox"/> Type U
ASTME 988		<input type="checkbox"/> Type C <input type="checkbox"/> Type D
	Linear voltage measurement	<input type="checkbox"/> -125 ... 125 mV <input type="checkbox"/> -125 ... 1100 mV
Sensor circuit (for RTD + resistance measurement only)		<input type="checkbox"/> 2-wire <input type="checkbox"/> <b>3-wire</b> (standard) <input type="checkbox"/> 4-wire 2-wire circuit: Compensation of sensor-wire resistance max. 100 Ω <input type="checkbox"/> .....Ω
Reference junction (for thermocouples only)		<input type="checkbox"/> Internal (for standard thermocouple, except type B) <input type="checkbox"/> no (TC type B) <input type="checkbox"/> External/temp.:.....°C
Flow range		<input type="checkbox"/> Measurement start: ..... (Standard: <b>0</b> ) <input type="checkbox"/> Measurement end: ..... (Standard: <b>100</b> )
Unit		<input type="checkbox"/> <b>Celsius</b> (standard) <input type="checkbox"/> Fahrenheit <input type="checkbox"/> Rankine <input type="checkbox"/> Kelvin
Characteristic behavior		<input type="checkbox"/> <b>rising 4 ... 20mA</b> (standard) <input type="checkbox"/> falling 20 ... 4mA
Output behavior for error		<input type="checkbox"/> <b>Override/22 mA</b> (standard) <input type="checkbox"/> Underdrive/3.6 mA
Output attenuation (T <sub>63</sub> )		<input type="checkbox"/> <b>Off</b> (standard) <input type="checkbox"/> ..... Seconds (1 ... 100 s)
Sensor number		<input type="checkbox"/> ..... (max. 8 characters)
TAG number		<input type="checkbox"/> ..... (max. 8 characters)
Software write protection		<input type="checkbox"/> <b>Off</b> (standard) <input type="checkbox"/> On



---

ABB has Sales & Customer Support  
expertise in over 100 countries worldwide.

[www.abb.com/temperature](http://www.abb.com/temperature)

The Company's policy is one of continuous product  
improvement and the right is reserved to modify the  
information contained herein without notice.

Printed in the Fed. Rep. of Germany (07.2008)

© ABB 2008

3KXT241001R1001



**ABB Limited**  
Salterbeck Trading Estate  
Workington, Cumbria  
CA14 5DS  
UK  
Tel: +44 (0)1946 830 611  
Fax: +44 (0)1946 832 661

**ABB Inc.**  
125 E. County Line Road  
Warminster, PA 18974  
USA  
Tel: +1 215 674 6000  
Fax: +1 215 674 7183

**ABB Automation Products GmbH**  
Borsigstr. 2  
63755 Alzenau  
Germany  
Tel: +49 551 905-534  
Fax: +49 551 905-555  
CCC-support.deapr@de.abb.com

DS/TTR200-EN Rev. A