

Level-Transmitter with internal diaphragm with stainless steel or ceramic element

Accuracy 0,1%, 0,25%, 0,35% und 0,5%

Standard output 4... 20 mA; 2-wire system
or 0... 20 mA; 3-wire system
or 0...10 VDC; 3-wire system

Features

small thermal effect
good long term stability

Applications


Level measurement in water, fuel and diesel oil
water supply, sewage treatment
depth or level measurement in wells and open waters
environmental engineering



Model	SD-60	SD-61
Accuracy	0,5 % of full scale value 0,35 % und 0,25 % ab 400 mbar 0,1 % ab 160 mbar of full scale value	0,5 % of full scale value
Ranges in bar	0...0,1, ...0,16, 0,25, 0,4, 0,6, 1,0, 1,6, 2,5, 4, 6, 10, 16, 25	0...0,6, 1,0, 1,6, 2,5, 4, 6, 10, 16, 25
Ranges in mWS	0...1, ...1,6, 2,5, 4,0, 6,0, 10, 16, 25, 40, 60, 100, 160, 250	0...6, 10, 16, 25, 40, 60, 100, 160, 250
Overload limit	3-x	3-x
Sensor element	Stainless Steel	Ceramik in monolithical construction
Repeability	< 0,05 % full scale value	< 0,05 % full scale value
Stability per year	< 0,1 % full scale value in rated conditions	< 0,2 % full scale value in rated conditions
Case	CrNi steel	CrNi steel
Wetted parts	CrNi-steel	CrNi steel, ceramik Al ₂ O ₃
Electrical connection	PVC-Cable 7,4 mm, or PUR, FEP	
Power supply	12...36 VDC (14...36 VDC for output 0...10 V)	
Power consumption	Output 4...20 mA: signal currency	voltage output 8 mA
Temp. influence	0,2 % / 10 K, zero point and measuring element	
Response time	< 10 ms (within 10% to 90% of full scale value)	
Protection type	IP 68 to EN 60529 /IEC 529	
Temperatures	Medium: -30°C up to 70°C	
Weight	0,2 kg, without cable	

Dimensions and Design

with internal diaphragm

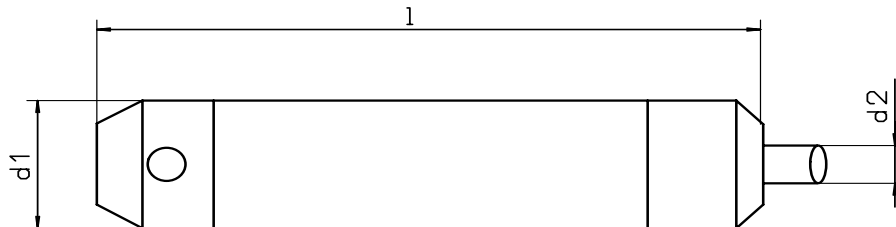

Electrical connection

Two-wire system

4...20 mA



Supply + = white
 Supply - = brown
 Ground = yellow/green (Shield)

Three - wire system

0...20 mA

0...10 V

Supply + = white
 Supply - = brown
 Signal + = green
 Ground = yellow/green (Shield)

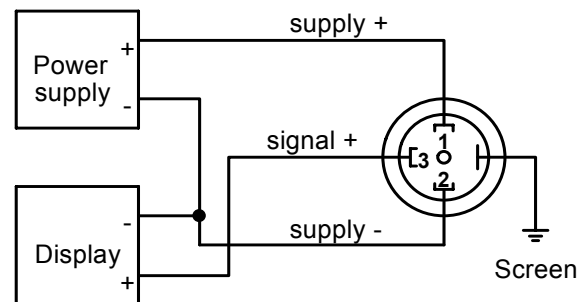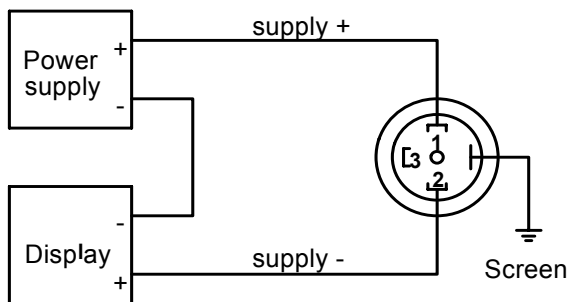

Dimensions in mm					
Typ	d1		d2	l	
SD-60	27		7,4	124,5	
SD-61	27		7,4	110	