



NivoRadar® 3000

Radar level transmitter

The multifunctional FMCW radar level transmitter for continuous monitoring of solids and liquids with two-wire technology – total reliability, even within difficult media. Certified for hazardous locations.



NivoRadar® 3000



- 78GHz Technology
- 4° beam angle
- Measuring range up to 100m
- High precision measurement
- Easy to install and setup
- Process temperature up to 200°C
- Lens antenna and mounting flange are flush
- Integrated lens cleaner
- Simple, six-step commissioning

Application: The robust stainless steel construction makes the NR 3000 extremely suitable for all kinds of industrial applications. The unit operates at a high frequency of 78 GHz thus achieving a very small beam angle which eliminates any signal interference at the flange but allows optimum reflection of the bulk solids material. The aiming flanges can be adjusted to ensure a perfect positioning of the NR 3000, ie the angle of the beam can be set to a specific point, for example the outlet of the silo. The lens antenna is highly resistant to material deposits and offers a self-clean function for extremely sticky solids using an air flush connection. The plug in display allows programming and diagnostics on-site making the installation and operation of the unit as easy as child's play.



Non-contact level transmitter

Flat flange



Aiming flange



Technical Detail

Housing	Stainless steel 1.4404 IP 68 (316L)
Measuring range/ tolerance	40m or 100m ±0.25%
Pressure range	3bar g (40 psi g) max.
Supply voltage	24 V DC (max. DC 30 V)
Process connection	Flat flange stainless steel 316L 80-150mm (3" - 6"), aiming flange aluminium diecast 80-150mm (3" - 6")
Process temperature range	-40°C up to +200°C
Signal output	4...20mA, 2-conductor
Communication	HART
Sensitivity	From DC value 1.6
Material lens antenna	PEI, PEEK
Frequency	78-79GHz FMCW

Table of contents

	Page
Overview	2
Specification	3
NR 3100	4
Accessories	6
Dimensions	7
Electrical installation	9
Spare parts	10

Subject to change.

Valid: From 01.04.2019 until 31.03.2020, unless otherwise agreed.

All dimensions in mm (inches).

By publishing this selection list all other lists become invalid.

All prices in Euro (€) or USD (\$),
excluding VAT.

We assume no liability for typing errors.

All EURO prices are EXW Betzigau,
all USD prices are EXW Memphis,
excluding packaging costs.

Different variations to those specified are possible.
Please contact our technical consultants.

Overview

Features

Continuous level measurement of solids and liquids applications with 78 GHz FMCW radar

Measurement range

- Up to 100 m (329 ft)

Mechanic


- Lens antenna and flange for quick and easy positioning
- Stainless steel housing
- Plane flanges and Easy aim flanges

Service

- Plug and play system, simple installation and commissioning
- Configuration with only 6 parameters on display with push buttons
- Alternative configuration via HART possible.

Approvals

- Approval for use in Hazardous Locations
- 2011/65/EU RoHS conform

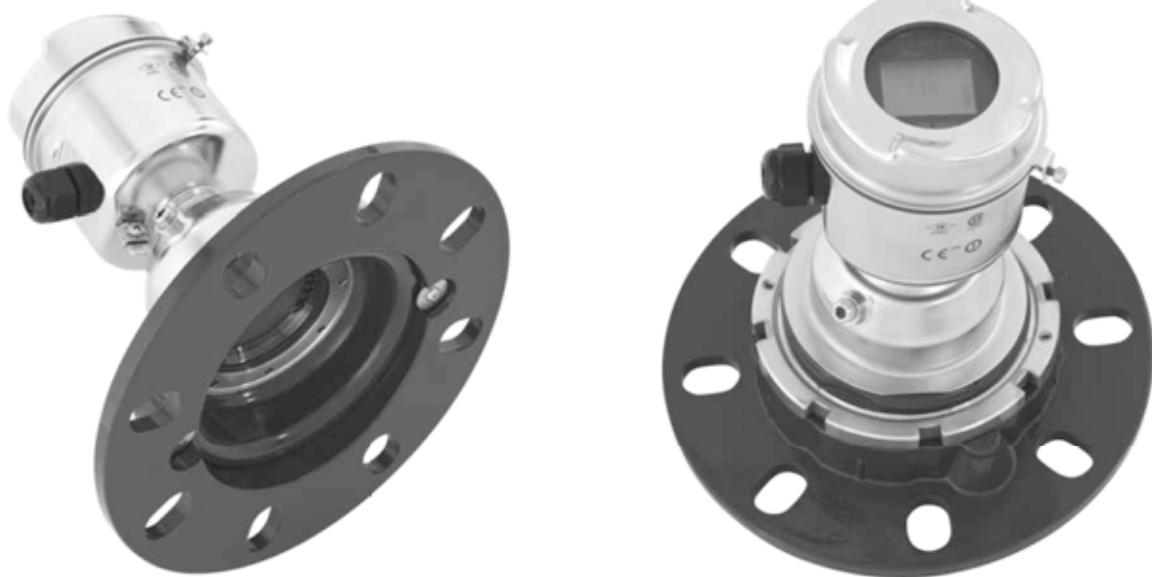


Application

Solids measurement

Aiming is strongly suggested for solid measurement. It helps to optimize the echo signal (mainly for low material level in the cone) and helps to solve not perfect mounting positions.

For proper mounting positions vertical installation without aiming is possible.

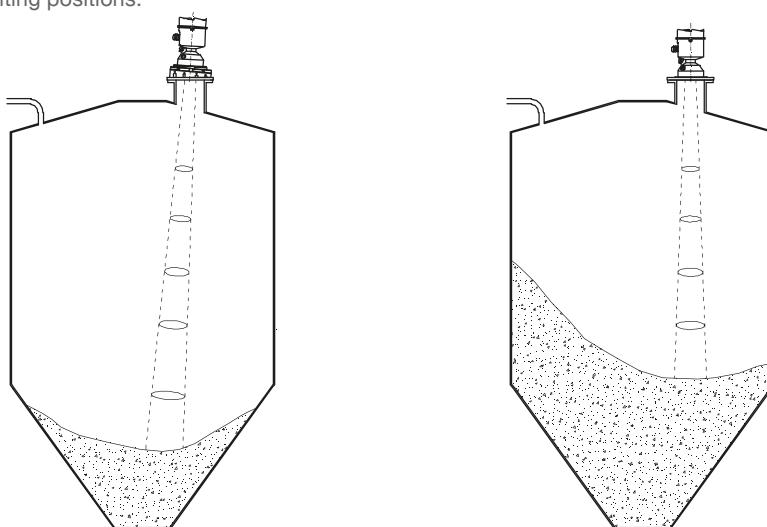

Specification

Specification

Process	Measurement range	40 m (131 ft) or 100 m (328 ft)
	Min. detectable distance	400 mm (15.7") from sensor reference point
	Process temperature	-40 .. +100°C (-40 .. 121°F) or -40 .. +200°C (-40 .. 392°F)
	Process overpressure	-1 .. +0.5 bar (-14.5 .. +43 psi) or -1 .. +3.0 bar (-14.5 .. +43 psi)
Performance	Frequency	78 .. 79 GHz FMCW
	Beam angle	4°
	Accuracy of measurement	5 mm (0.2")
	Update time	Maximum 10 seconds (Response Rate (2.4.1.) set to FAST)
	Dielectric constant of material measured	For ranges up to 20 m (65.6 ft): min. DK = 1.6 For ranges up to 100 m (328 ft): min. DK = 2.5
Mechanics	Ingress protection	Type 4X/NEMA 4X, Type 6/NEMA 6, IP68
	Enclosure	316L/ 1.4404 Lid with window (window material polycarbonate)
	Lens antenna	Material: 40 m version: PEI 100 m version: PEEK
	Air Purge Connection	Female 1/8" NPT fitting Non return valve for 6 mm tube (optional)
Electronics	Power supply/ Communication	4-20 mA loop power Nominal 24V DC (16.5 .. 30 V DC) Protocol HART, Version 6.0
	Plug on display (inside housing)	Removeable graphic LCD, with bar graph representing level
Approvals	CE	
	ATEX/ IEC-Ex	
	Zone 20 and Zone 20/21	Dust ignition proof
	Zone 2	Non-sparking/ Energy Limited
	FM/ CSA	
	General purpose	
	Cl. II, III Div.1	Dust ignition proof
	Cl. I Div.2	Non-incendive
	Radio	
	R&TTE (Europe) FCC Conformity (US) Industry Canada	

NR 3100



Version with plane flange
Fig. states plane flange 100 mm/ 4"



Version with Easy Aimer flange
Fig. states Easy Aimer flange 100 mm/ 4"



Plug on Display
With push buttons.

For programing of the unit.
Once programmed, the Plug on Display can
be removed if desired and used to copy
parameters to multiple units.

Dimensions see page 7

NR 3100

Basic type

NR 3100

pos.2

Certificate⁽¹⁾ (detailed Ex-markings: see page 8)

	Dust	Gas	Protection method
0 CE FM/ CSA	- -	- -	- General purpose
F ATEX/ IEC-Ex ATEX/ IEC-Ex FM/ CSA FM/ CSA	Zone 20 and 20/21 - Cl. II, III, Div.1	- Zone 2 -	Dust Ignition Proof Non-sparking/ Energy Limited Dust Ignition Proof Non-incendive
		Cl. I Div.2	

pos.3

Process temperature

- 1 max. 100°C
- 2 max. 200°C⁽²⁾

pos.4

Process pressure

- 1 0.5 bar
- 2 3 bar

pos.5

Electronic module

- A 2-wire 4-20mA, HART

pos.6

Process connection⁽³⁾

A Flange 80 mm/ 3"	plane	1.4301 (304)	max. 3 bar/ 200°C
B Flange 80 mm/ 3"	plane	1.4404 (316L)	max. 3 bar/ 200°C
C Flange 80 mm/ 3"	Easy Aimer	aluminium ⁽⁴⁾	max. 3 bar(\leq 120°C), max. 0.5 bar (>120 .. 200°C)
D Flange 100 mm/ 4"	plane	1.4301 (304)	max. 3 bar/ 200°C
E Flange 100 mm/ 4"	plane	1.4404 (316L)	max. 3 bar/ 200°C
F Flange 100 mm/ 4"	Easy Aimer	aluminium ⁽⁴⁾	max. 3 bar(\leq 120°C), max. 0.5 bar (>120 .. 200°C)
G Flange 150 mm/ 6"	plane	1.4301 (304)	max. 3 bar/ 200°C
H Flange 150 mm/ 6"	plane	1.4404 (316L)	max. 3 bar/ 200°C
I Flange 150 mm/ 6"	Easy Aimer	aluminium ⁽⁴⁾	max. 3 bar(\leq 120°C), max. 0.5 bar (>120 .. 200°C)

pos.7

Measurement range

- 1 max. 40 m
- 2 max. 100 m⁽²⁾

pos.8

Cable entry

- A M20 x 1.5 cable gland
- B NPT ½" conduit

pos.9

Plug on Display

- 1 Without display
- 2 With display

Basic type

NR 3100	A								
Position	1	2	3	4	5	6	7	8	9

← Order code

All positions are available in special design (use code "Z").

(1) 0 and F including radio approvals R&TTE , FCC, Industry Canada

(2) Only available as combination 200°C and 100 m range

(3) Fitting to ANSI/DIN/JIS standards

(4) Painted

Accessories

Accessories

Minimum order value for spare parts or accessories is 75 €.

zu400500	Adapter M20 x 1.5 to NPT 1/2" conduit	•
zu400510	Sun shield cover	•
	stainless steel 1.4301/ 304	
zu400520	Non return valve	•
	For purge inlet. Stainless steel. Connection of 6mm tube diameter. Opens at ca. 0.5 bar (7.25 psi).	
zu400530	HART Modem	•
	USB HART Interface to connect a PC with the NR 3000 for commissioning and servicing.	


Fixing material for mounting the unit on a flange

zu107010	8 bolts M16 x 60, 16 washers, 8 nuts. Stainless steel. Fitting for 80 mm/ 3" and 100 mm/ 4" flanges	•
zu107020	8 bolts M20 x 60, 16 washers, 8 nuts. Stainless steel. Fitting for 150 mm/ 6" flanges	•



Sealings for mounting the unit on a flange

Flange sealing fitting for plane flange or Easy Aimer flange, EN 1092-1 (PN16), ASME B16.5 (150 lb), JIS 2220 (10K)
 Material AFM30, max. 250°C

di300135	80 mm/ 3"	•
di300136	100 mm/ 4"	•
di300137	150 mm/ 6"	•




Sun protection cover

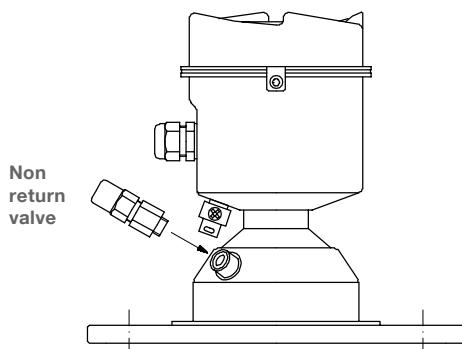

HART Modem


Dimensions

Plane flange version

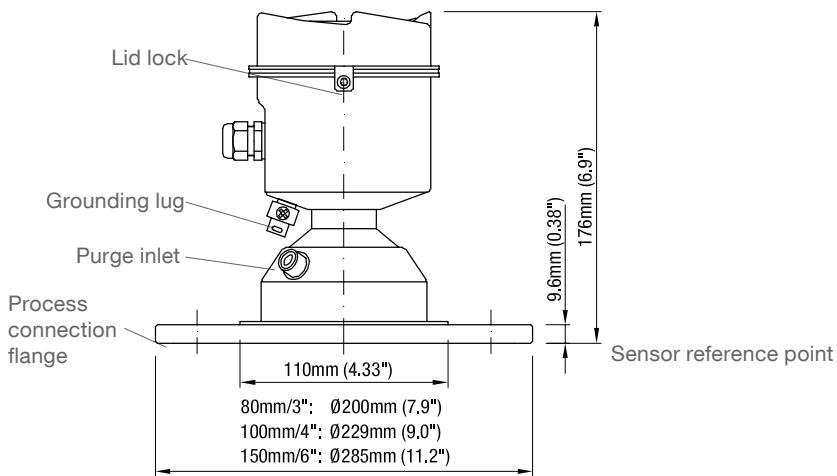


Bolt holes: see next page

Easy Aimer flange version
 80 mm/ 3"

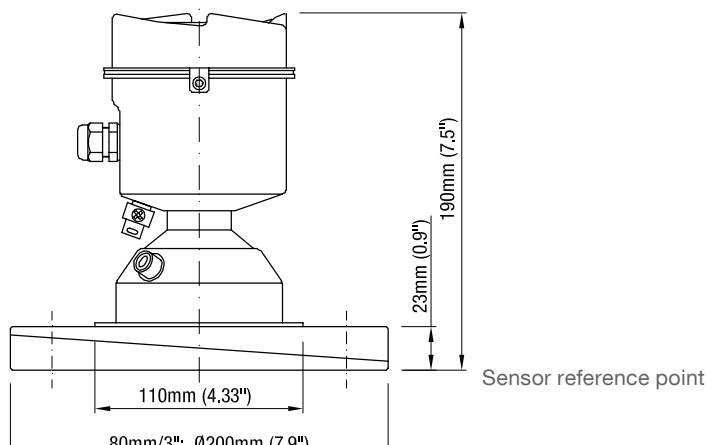

Bolt holes: see next page


Easy Aimer flange version
 100 mm/ 4"
 150 mm/ 6"

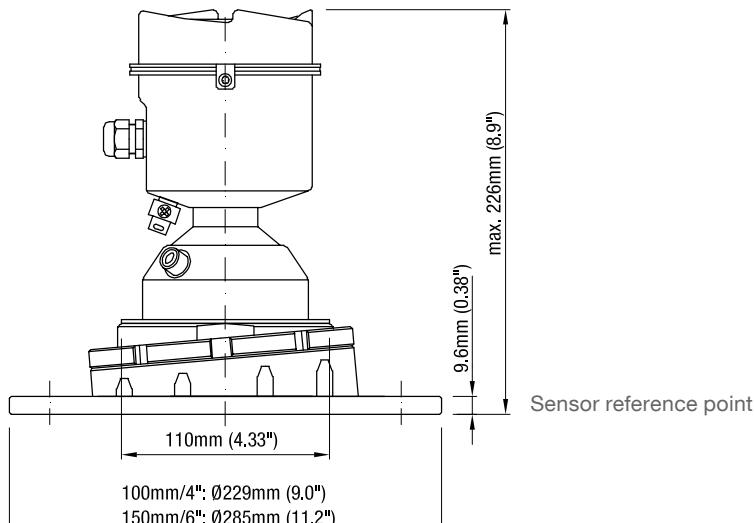

Bolt holes: see next page

Dimensions

Flanges

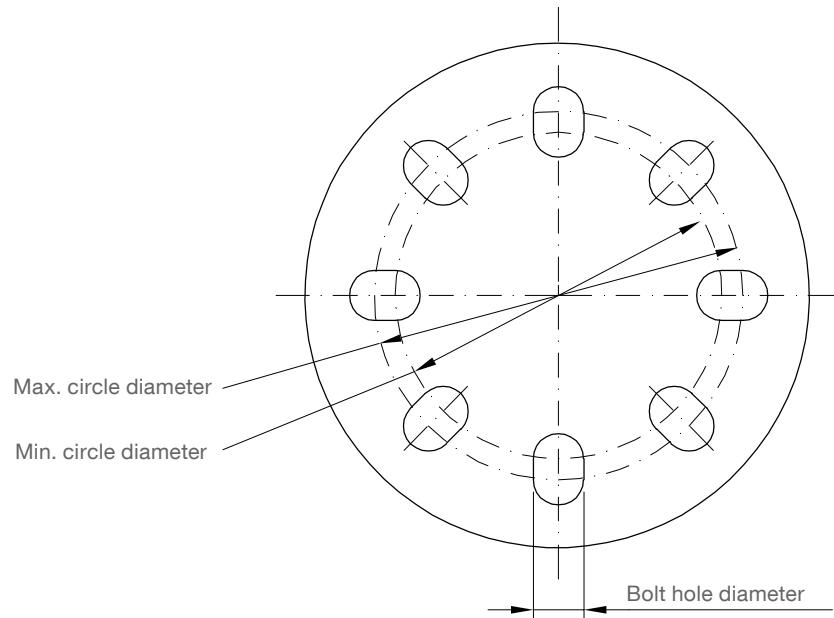

Universal flange (plane flange and Easy aimer flange) mates with bolt hole pattern of:
 EN 1092-1 (PN16)
 ASME B16.5 (150 lb)
 JIS 2220 (10K)

Pipe size	Max. circle diameter	Min. circle diameter	Bolt hole diameter	Number of bolt holes
80 mm/ 3"	160 mm (6.30")	150 mm (5.91")	19.3 mm (0.76")	8
100 mm/ 4"	191 mm (7.52")	175 mm (6.89")	19.3 mm (0.76")	8
150 mm/ 6"	242 mm (9.53")	240 mm (9.45")	23 mm (0.90")	8

Detailed Ex-markings

pos.2


Certificate

0	CE FM/ CSA	General purpose
F	ATEX IEC-Ex ATEX IEC-Ex FM/ CSA FM/ CSA	ATEX II 1D, 1/2D, 2D Ex ta IIIC Ex ta IIIC T139°C Da ATEX II 3G Ex nA II T4 Gc, Ex nL IIC T4 Gc Ex nA II T4 Gc, nL IIC T4 Gc DIP Class II, Div.1, Gr. E, F, G, Class III NI Class I, Div.2, Gr. A,B,C,D

Electrical installation

4-20 mA

The terminals are located below the display. To connect the unit, remove the display by gently turning the display a quarter turn counter-clockwise until it is free.




Use twisted pair cable: 0.34 mm² to 2.5 mm² (AWG 22 to 14)
 Connect cable shield to ground terminal

24 V DC/ 4-20 mA loop

4-20 mA HART

Typical PLC/mA configuration with HART:

- Depending on the system design, the power supply may be separate from the PLC, or integral to it.
- HART resistance (total loop resistance, that is, cable resistance plus 250 Ohm (external resistor) must be less than 550 Ohm @24V supply for the device to function properly.
- The external resistor is not required, if the PLC has an integral 250 Ohm resistor.

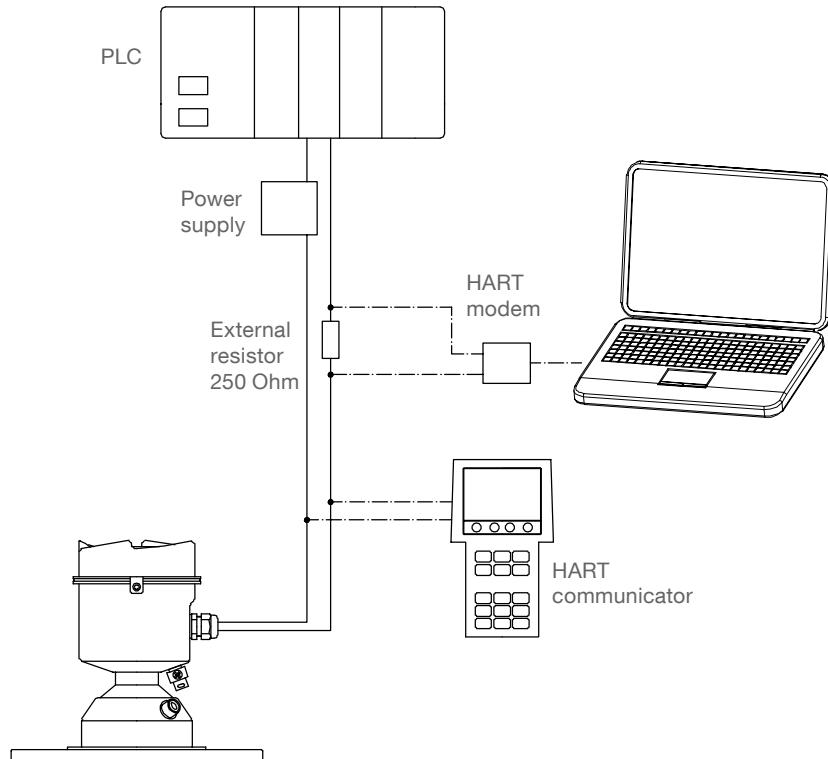

Spare parts

Minimum order value for spare parts or accessories is 75 €.

Spare part Article number

Electronics

Plug on display	pl400500	•
Electronic module, measurement range max. 40 m	pl400501	•
Electronic module, measurement range max. 100 m	pl400502	•

Sealings


Sealing for lid	zu400505	•
-----------------	----------	---

Housing


Lid with glas window	zu400509	•
Sun protection cover (stainless steel 1.4301/ 304)	zu400510	•

Diverse

Non return valve	zu400520	•
Wrench for 100 mm/ 4" and 150 mm/ 6" Easy Aimer	zu400521	•
Allen key 3 mm for 100 mm/ 4" and 150 mm/ 6" Easy Aimer	zu400522	•

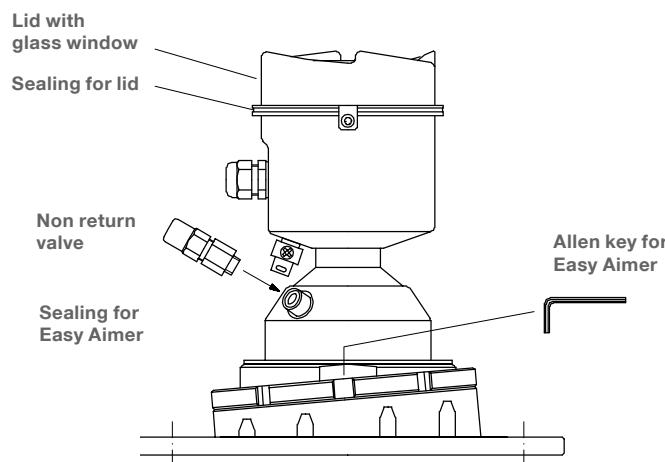

Sun protection cover



Plug on display

